

DS12040RWI

DATA SHEET



The best solution for **silent** marking of **metals** and hard **plastics**.


Precise, sharp and **long-lasting** results at maximum speed with small dimensions.

Large marking window, ideal for **integration** systems.

Protection system equipped as standard to protect the mechanics against environmental impurities, thus obtaining a compact and **robust** design with low maintenance.

| | |
|-------------------|-------------|
| Marking area | 120 x 40 mm |
| Marking speed | 6 char/s |
| Marking depth | max 0.2 mm |
| Character heights | 1 - 20mm |
| Air pressure | 3 bar |
| Weight | 3.25kg |
| Cable length | 3.5 m |
| Height adjustment | optional |



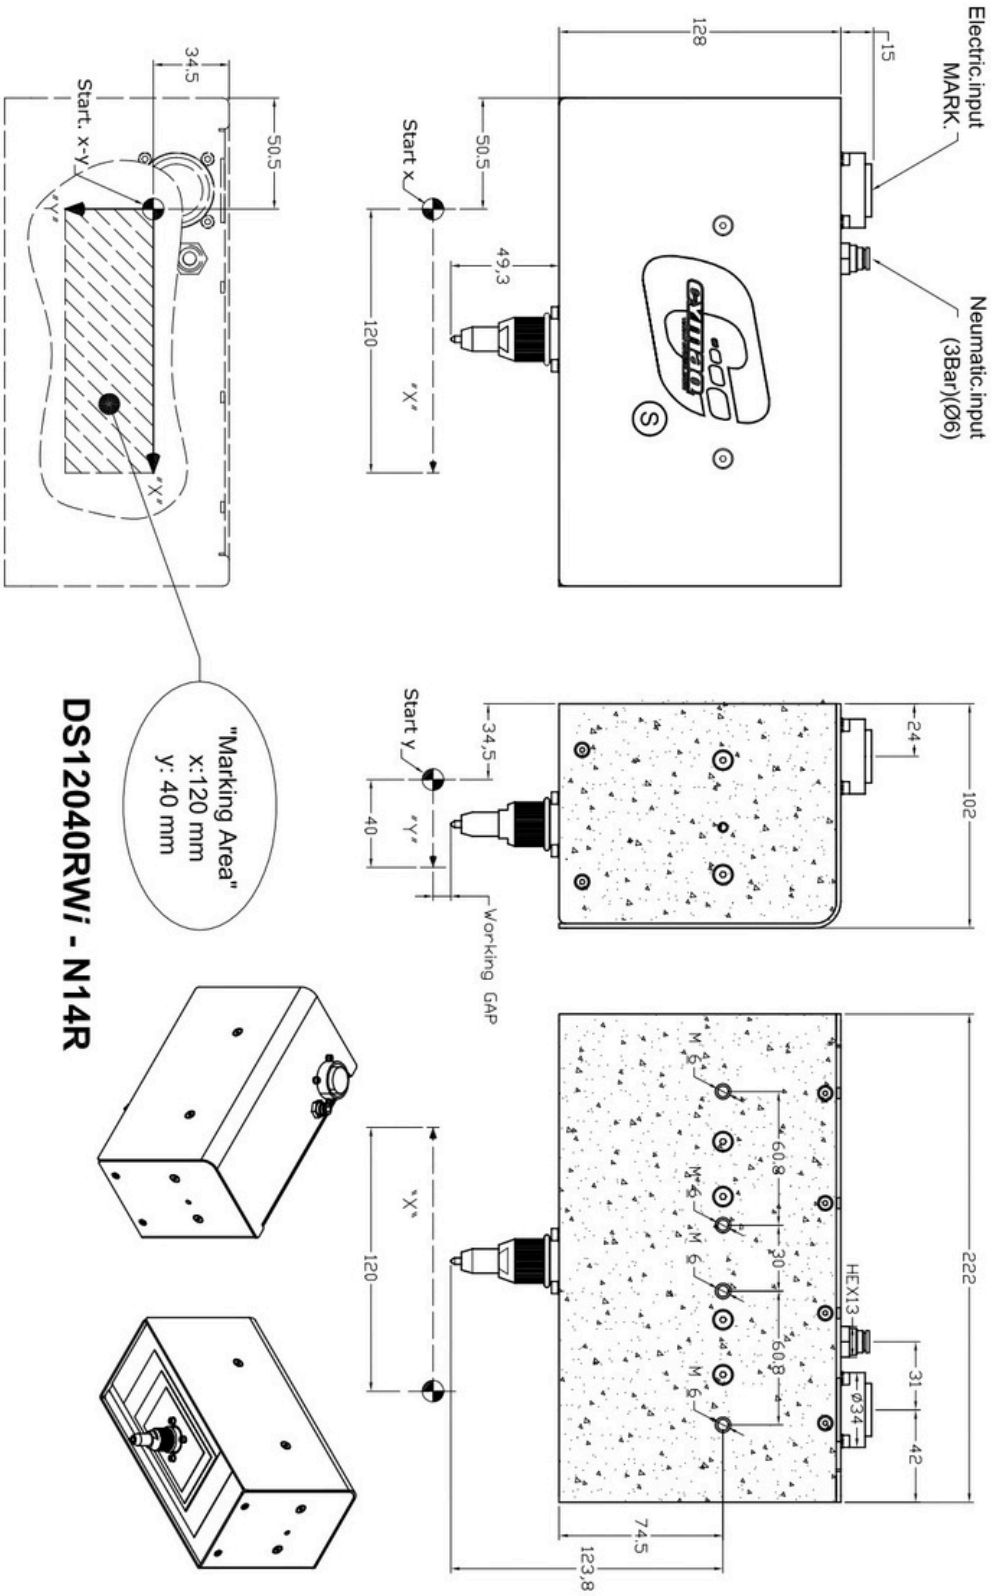

DS12040RWI - N14R

